



PINNACLE FOAM CONCENTRATES

PEAK FIREFIGHTING PERFORMANCE


Premium Performance, Outstanding Value

Pinnacle foam concentrates are designed to provide rapid knockdown and extinguishment on a broad range of Class A and Class B fires. Providing premium performance at an economical price, Pinnacle Foams are available in three formulations:

Pinnacle Class A Foam

Pinnacle Class A foam is an effective and economical solution for Class A firefighting. It has exceptional foaming characteristics, is noncorrosive, and is an environmentally responsible answer to your everyday firefighting needs. Pinnacle Class A provides a thick, wet blanket that smothers, penetrates, clings and lasts. It works with fresh, salt and brackish water, and can also be used as training foam on the fireground.

Recommended proportioning rates range from .10 to 1.0% on Class A fires.

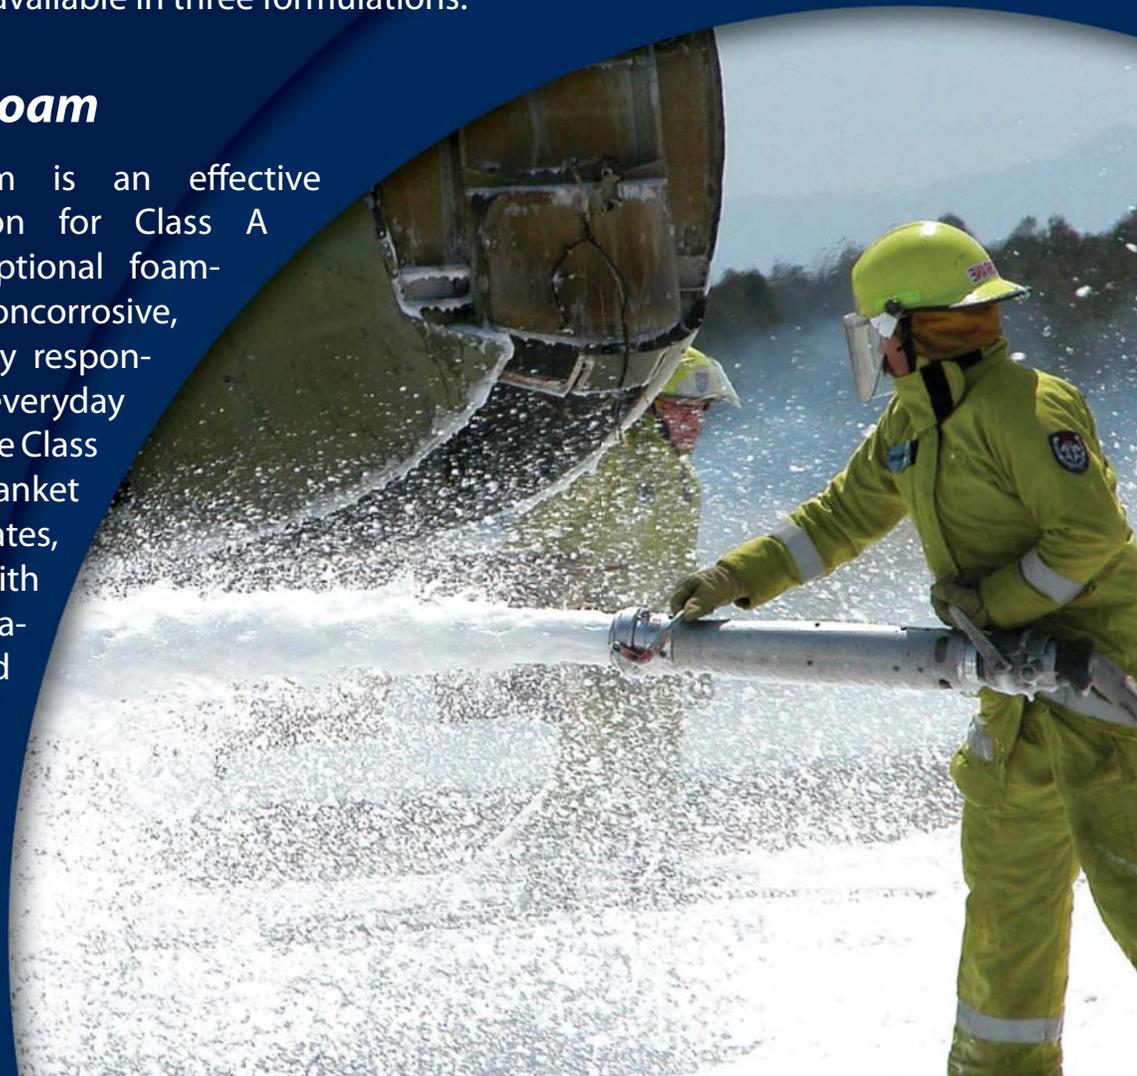

PINNACLE FOAM CONCENTRATES

PEAK FIREFIGHTING PERFORMANCE

Pinnacle 3% AFFF

Pinnacle 3% AFFF is UL Listed for use on Class B fuel fires. It features fast knockdown and spreading characteristics, forming a film that rapidly seals fuels and vapors. It is suitable for use with all types of firefighting equipment. It is very effective as a fast fire knockdown agent that prevents fire from spreading.

Pinnacle 3% AFFF has been tested to comply with all applicable standards of UL 162, Foam Concentrates, and NFPA 11 and is UL Listed at a proportioning rate of 3.0% for all Class B, nonpolar fuel fires.

Pinnacle 3X3 AR-AFFF

Pinnacle 3X3 AR-AFFF is a foam concentrate developed for use in extinguishing both polar and nonpolar solvent fires, including ethanol and ethanol-blended fuels. It allows for quick fire control and forms a polymeric layer across fuels that mitigates vapors and self-seals if disturbed. Pinnacle AR-AFFF contains polysaccharides, which form a pseudo-plastic film on the surface of polar solvents. AR-AFFF provides more stability and better burnback resistance than conventional AFFF.

Pinnacle 3X3 AR-AFFF has been tested to comply with all applicable standards of UL 162 and NFPA 11 and is UL Listed at a proportioning rate of 3.0% for all Class B, polar and nonpolar fuel fires.

All Pinnacle foam concentrates are suitable for use in type III nozzles, monitors, foam tubes, CAFS and fixed systems. They are noncorrosive and environmentally responsive.

Pinnacle is available in 5-gallon pails, 55-gallon drums and 250/275-gallon totes. Pinnacle can also be used in a custom-engineered, HCT Concentrate Control System.



HAZARD CONTROL TECHNOLOGIES, INC. FIRE, VAPOR, AND CONTAMINATION CONTROL SOLUTIONS

150 WALTER WAY, FAYETTEVILLE, GA 30214

PHONE: 770-719-5112

FAX: 770-719-5117

EMAIL: info@hct-world.com

Learn More Online:

www.hct-world.com/pinnacle

